



Model 238 SIDE ENTRY DUST COLLECTOR

The NOL-TEC side entry dust collector effectively filters dust laden air created by pneumatic conveying systems or other processes.

STANDARD FEATURES:


- 12-gauge continuous welded construction
- Reinforced housing
- Large access door
- Venturi reverse jet cleaning
- Solid state electronic timer
- Quick-release bag clamps
- Continuous cleaning
- Bottom grid
- Magnehelic gauge
- Bird screen and weatherboard

OPTIONAL FEATURES:

- Stainless steel construction
- Variety of filter bag materials
- Cartridges for increased filter area
- Exhauster
- Second access door
- Hopper bottom
- Explosion-proof design
- High-temperature design

SPECIFICATIONS:

- **Air:** Clean and dry at correct pressure dew point; 80 PSIG minimum
- **Electrical:** 110-120V; 50/60Hz
- **Temperature (timer):** 40° F to 150° F
- **Temperature (polyester bags):** 270° F

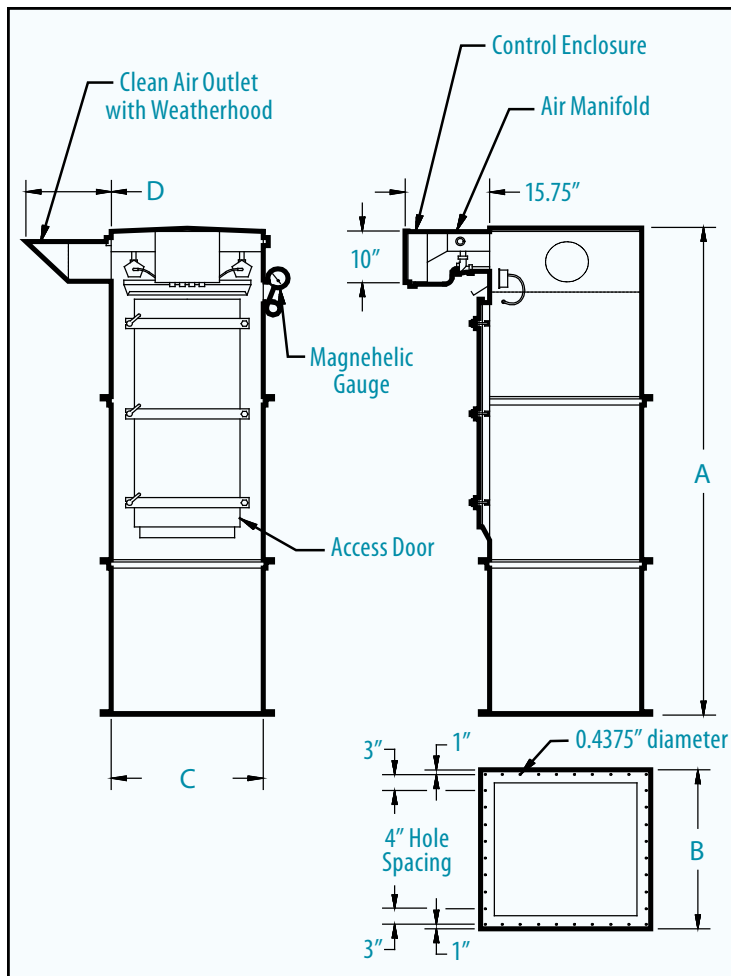

Specifications subject to change without notice.

SIDE ENTRY DUST COLLECTOR							
MODEL	FILTER AREA	A	B	C	D	SCFM @100 PSIG	SHIP WEIGHT
36-NT-9	41 ft ²	5'	28"	24"	16"	4.4	325 lbs
60-NT-9	68 ft ²	7'	28"	24"	16"	4.6	425 lbs
84-NT-9	95 ft ²	9'	28"	24"	16"	5.2	500 lbs
36-NT-16	72 ft ²	5'	36"	32"	16"	5.7	475 lbs
60-NT-16	120 ft ²	7'	36"	32"	16"	5.9	600 lbs
84-NT-16	168 ft ²	9'	36"	32"	16"	6.3	725 lbs
60-NT-25	188 ft ²	7'	44"	40"	16"	6.6	775 lbs
84-NT-25	263 ft ²	9'	44"	40"	16"	7.1	950 lbs
60-NT-36	270 ft ²	7'	52"	48"	20"	8.2	1,000 lbs
84-NT-36	378 ft ²	9'	52"	48"	20"	8.6	1,250 lbs
60-NT-49	368 ft ²	7'	60"	56"	20"	9.1	1,800 lbs
84-NT-49	515 ft ²	9'	60"	56"	20"	9.6	2,200 lbs
60-NT-64	480 ft ²	7'	68"	64"	20"	10.9	2,600 lbs
84-NT-64	672 ft ²	9'	68"	64"	20"	11.5	3,000 lbs
84-NT-81	851 ft ²	9'	76"	72"	20"	13.5	4,125 lbs
84-NT-100	1,050 ft ²	9'	84"	80"	20"	17.5	4,350 lbs

Nol-Tec Systems, Inc.

425 Apollo Drive

Lino Lakes, MN 55014

(651) 780-8600 • (651) 780-4400 fax

sales@nol-tec.com • www.nol-tec.com